

ADA 039964

AD

DETERMINATION OF SYNTHETIC HYDROCARBONS IN HYBRID MINERAL OIL LUBRICANTS

INTERIM REPORT
AFLRL NO. 86

(12)

by

L. L. Stavinoha

U. S. Army Fuels and Lubricants Research Laboratory
Southwest Research Institute
San Antonio, Texas

under contract to

U. S. Army Mobility Equipment Research
and Development Command
Energy and Water Resources Laboratory
Fort Belvoir, Virginia


Approved for public release; distribution unlimited

Contract No. DAAG53-76-C-0003

January 1977

AD No. _____

DDC FILE COPY,

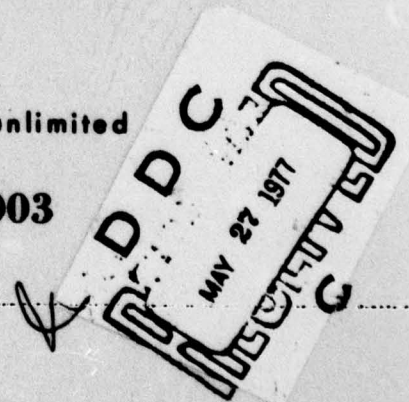

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Trade names cited in this report do not constitute an official endorsement or approval of the use of such commercial hardware or software.

DDC Availability Notice

Qualified requestors may obtain copies of this report from Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.

Disposition Instructions

Destroy this report when no longer needed. Do not return it to the originator.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER (4) AFLRL 86	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) (6) DETERMINATION OF SYNTHETIC HYDROCARBONS IN HYBRID MINERAL OIL LUBRICANTS.		5. TYPE OF REPORT & PERIOD COVERED (9) Interim Report.
7. AUTHOR(s) (12) L.L. Stavino		6. PERFORMING ORG. REPORT NUMBER AFLRL No. 86
9. PERFORMING ORGANIZATION NAME AND ADDRESSES U.S. Army Fuels & Lubricants Research Laboratory Southwest Research Institute, P.O. Box 28510 San Antonio, Texas 78284		8. CONTRACT OR GRANT NUMBER(s) (15) DAAG53-76-C-0003
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Mobility Equipment Research & Development Command, Energy & Water Resources Laboratory, Ft. Belvoir, VA 22060		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (12) 11P.
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE (11) Jan 77
		13. NUMBER OF PAGES 8
		15. SECURITY CLASS. (of this report)
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Synthetic Hydrocarbons Polyalpha Olefins Lubricants Mineral Oil Lubricants Gas Chromatography		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An analytical gas chromatographic procedure has been developed to qualitatively and quantitatively detect polyalpha olefins such as oligomers of decene-1 in hybrid mineral oil lubricants. The polyalpha olefin synthetic hydrocarbons used in hybrid lubricants are narrow boiling compounds producing specific peaks as compared to the broad range gaussian type distribution of mineral oils. Difficult base line definition and undetectable components such as C ₆₀ oligomers produce errors which are acceptable even if larger than desired.		

DDC
MAY 27 1977
C

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified


SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

387 339

mt

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

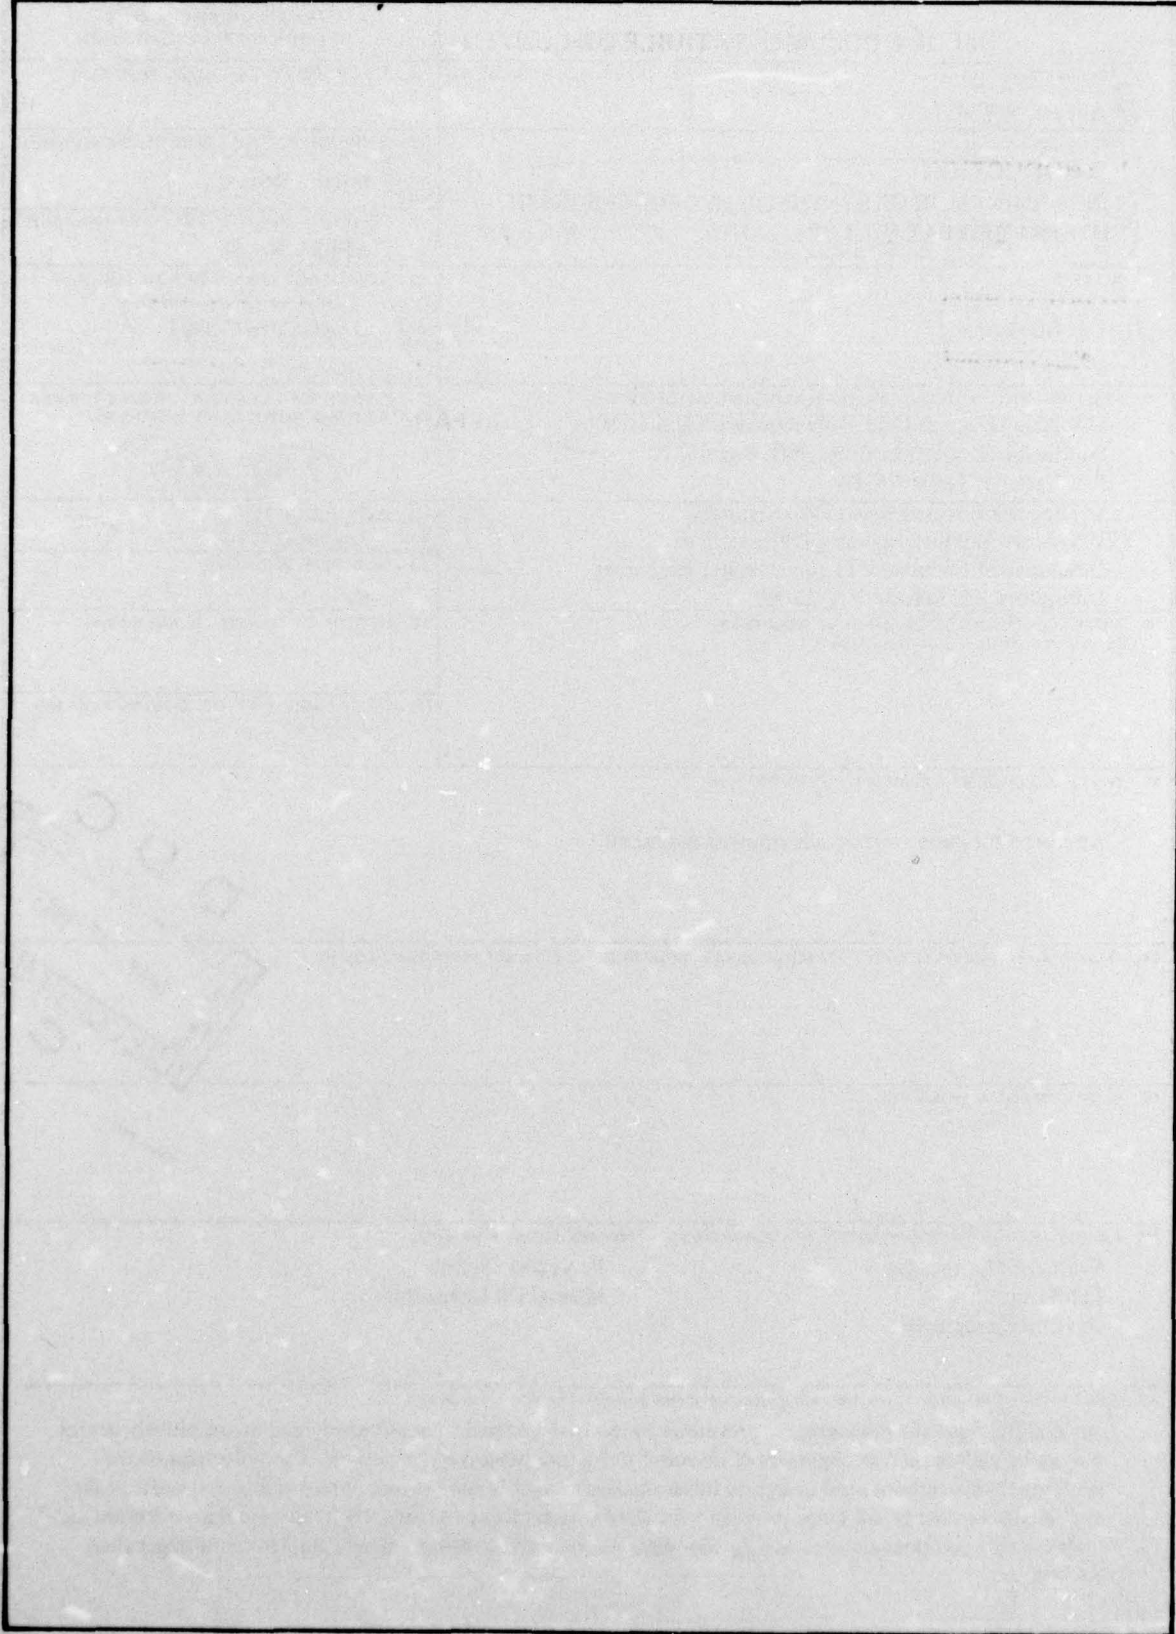

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
INTRODUCTION	3
EXPERIMENTAL	3
RESULTS AND DISCUSSIONS	4
CONCLUSIONS	6
APPENDIX—GAS CHROMATOGRAPHIC OPERATING PARAMETERS	9

ACCESSION for	
RTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. AND/OR SPECIAL
A	

INTRODUCTION

The Army develops and maintains specifications for the procurement of all lubricants used in Department of Defense ground-powered equipment and has the custodial responsibility for the specifications which the Federal Government uses to purchase principal automotive lubricants used in both combat and administrative fleets.

Advanced equipment needs have imposed stringent lubrication requirements and have caused the Army to consider modern lubricant formulation technology which includes pure and hybrid blends of synthetic and mineral oil base stocks. In Army lubrication research programs, the properties and physical performance characteristics of many synthetic and mineral oil-based lubricants have been evaluated⁽¹⁾ and efforts to provide chemical analysis approaches to better characterize these lubricants have been intensified.⁽²⁾ To properly understand the nature of today's complex lubricants, it has become necessary for the Army to develop and use more extensive analytical methods. This has provided a basis for the characterization of the many different lubricants or combinations of lubricants used in fielded equipment. Additionally, these analytical methods are potentially beneficial in providing quality assurance, detecting contaminants, and data for determining composition to performance correlations.

Synthetic hydrocarbons of the polyalpha olefin type are one class of synthetic lubricant base stock which has been identified in certain ester hybrid lubricants. In the work cited in reference 2 concerning development of analytical approaches to the characterization of synthetic lubricant base stocks, no procedures were established for base stock blends of polyalpha olefins and mineral oil.

The properties of both polyalpha olefins (specifically, oligomers of decene-1) and mineral oil lubricant base stocks are similar since they are both hydrocarbons. However, the boiling point distribution chromatograms of polyalpha olefins (PAO) are relatively simple compared to those of mineral oils. The PAO oligomers are narrow boiling compounds producing specific peaks as compared to the broad range gaussian-type distribution of mineral oil lubricants.⁽²⁾ Based on these properties, a program was initiated to demonstrate the qualitative and quantitative ability of gas chromatography to detect and measure PAO in PAO-mineral oil-based lubricants.

EXPERIMENTAL

Two PAO samples A and B were used to prepare mixtures of PAO in a fully formulated mineral oil based lubricant (AL-6519-L). The boiling point distributions for the neat mineral oil lubricant and the PAO samples are given in Table 1. The gas chromatographic (GC) operating parameters are detailed in the

TABLE 1. BOILING POINT DISTRIBUTION
FOR TEST FLUIDS

Boiling Point Distribution, wt % Off	Boiling Point, °C		
	Mineral Oil AL-6519-L	PAO Sample A (4 cs)	PAO Sample B (6 cs)
IBP	331	326	302
5	360	404	414
10	373	410	417
20	395	415	423
30	414	417	428
40	432	420	474
50	451	423	484
60	473	426	490
70	502	428	506
80	534	434	526
90	568	481	538
95	600	488	557
last % off/BP	96.2/606	99.5/532	99.5/586
Residue	3.8%	0	0

(1) S.J. Lestz, J.A. Russell (USAFRL), and T.C. Bowen and M.E. LePera (USAMERADCOM), "Evaluation of Synthetic Automotive Crankcase Lubricants for Military Applications," AFLRL Interim Report No. 71, AD A023613, December 1975.

(2) L.L. Stavinoha, G.E. Fodor, F.M. Newman and S.J. Lestz, "Analytical Approach to the Characterization of Military Lubricants," AFLRL Interim Report No. 77, AD A027397, March 1976.

TABLE 2. CARBON NUMBER DISTRIBUTION OF PAO SAMPLES

	Carbon Number Distribution, wt %				
	C ₂₀	C ₃₀	C ₄₀	C ₅₀	Other
PAO Sample A	3	78	17	2	0
PAO Sample B	1	32	36	24	8

Both of the PAO samples A and B contain C₂₀, C₃₀, C₄₀, and C₅₀ hydrocarbons boiling at 330, 421, 485, and 527°C, respectively. Table 2 contains the carbon number distribution for the PAO samples using peak areas related to the internal standard to determine concentrations.

The boiling point calibration standard was a mixture of C₅-C₄₀ *n*-saturates. The standard's chromatogram is shown in Figure 1. The chromatograms for PAO samples A and B and the mineral oil (AL-6519-L) are also reproduced in Figure 1. The AL-6519-L mineral oil sample is a fully-formulated multipurpose (API SE/CD) high-base engine lubricant. The gas chromatographic characteristics of AL-6519-L in Figure 1 are representative of both military and commercial mineral oil based lubricants in that the GC chromatograms are of a gaussian-type having very small, if any, distinguishing *peak* features. Additives in fully formulated mineral oil lubricants have not been distinguishable as peaks.

Based on the *n*-saturate boiling point calibration, the boiling point range for the PAO components by carbon number are indicated in Table 3. The middle boiling point given in Table 3 corresponds to the middle of the peak, and the range approximately covers the majority of the peak

TABLE 3. BOILING POINT RANGE FOR PAO COMPONENTS BY CARBON NUMBER

	Carbon Number			
	C ₂₀	C ₃₀	C ₄₀	C ₅₀
Middle Boiling Point, °C	330	421	485	527
Range, °C	319-338	405-433	457-518	518-549

TABLE 4. CHROMATOGRAPHIC ANALYSIS RESULTS FOR MIXTURES OF PAO AND MINERAL OIL

PAO Sample Code	PAO Concentration In Lubricant AL-6519-L wt %		Analytical Variation	
	Known	Analysis Average* (No. of Runs)	Maximum Deviation from Known	Average Error, %
A	10.0	7.9(4)	- 3.1	-21
A	21.8	19.1(3)	- 3.3	-12
A	51.5	55.3(3)	+10.7	+ 7.4
A	100	100.6(1)	+ 0.6	+ 0.6
B	10.3	6.8(2)	- 4.2	-34
B	29.8	24.5(5)	- 9.2	-18
B	50.5	42.7(3)	- 8.9	-15.4
B	100	92.0(1)	- 8.0	- 8.0
B	10.3	10.3(2)*	- 1.5*	0 *
B	29.8	23.8(3)*	- 8.2*	-20 *
B	50.5	44.7(3)*	- 8.9*	-10.5*

Laboratory data system results except for asterisk () values which were obtained using a planimeter.

appendix and were used for all GC analyses contained in this report. An *n*C₁₃ -*n*C₁₅ internal standard was used for quantitation.

RESULTS AND DISCUSSIONS

base in Figure 1 using peak side extrapolation. It should be noted that the PAO carbon numbers in Table 3 do not correspond to the *n*-saturate carbon numbers with respect to boiling points. This is further emphasized in Figure 1 where the C₂₀, C₃₀, C₄₀, and C₅₀ PAO hydrocarbons correspond to *n*C₁₉, *n*C₂₇, *n*C₃₄, and *n*C₄₁, respectively.

Known mixtures of PAO samples A and B and the mineral oil lubricant, AL-6519-L, were prepared and analyzed. The analytical data for these mixtures have been summarized in Table 4. Generally, low values were obtained but repeatability was considered reasonable. The errors encountered in analyzing the mixtures is due, in part, to the baseline characteristics of the samples with respect to computing capabilities. The

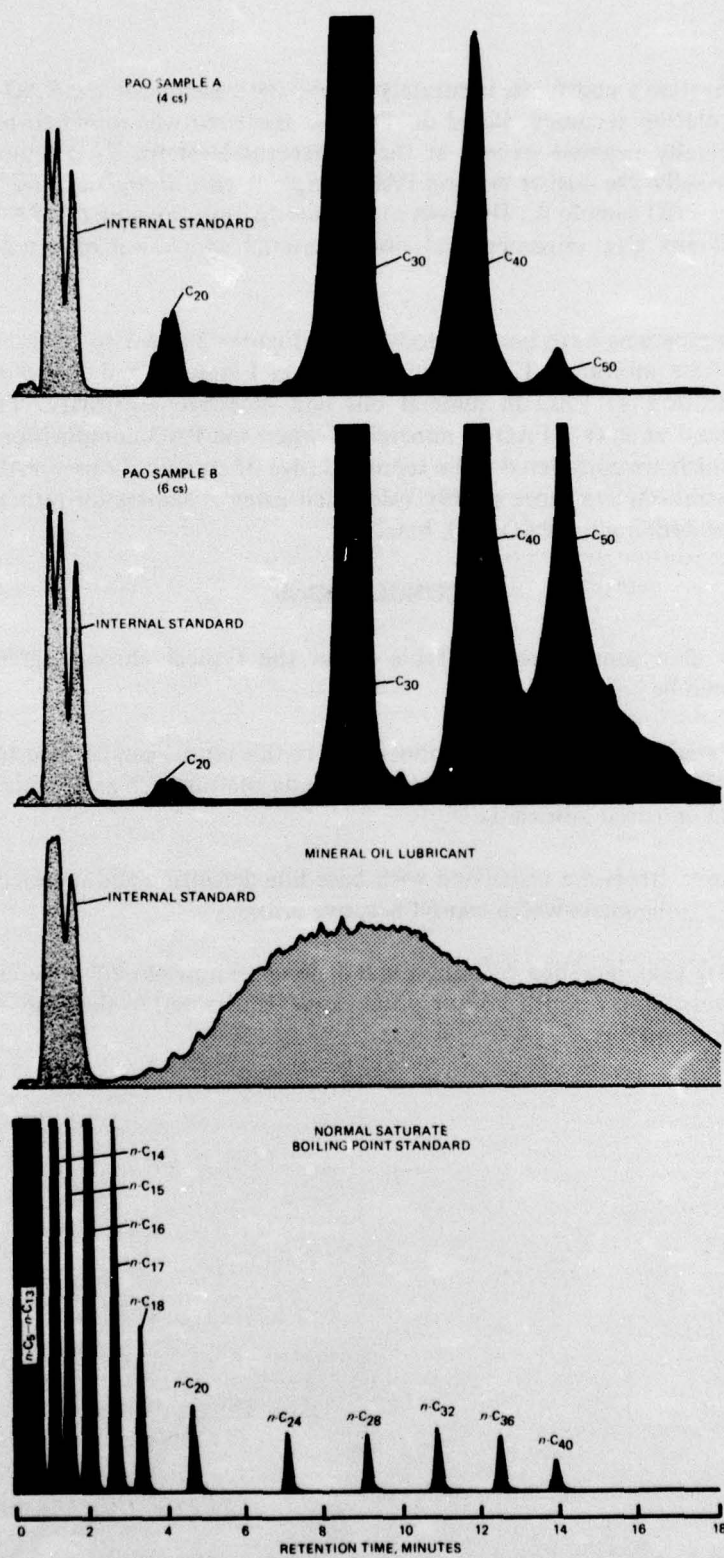


FIGURE 1. GAS CHROMATOGRAMS FOR PAO SAMPLES, A MINERAL OIL LUBRICANT, AND A BOILING POINT STANDARD

Laboratory Data System's ability to accurately define the baseline of the PAO component peaks will affect the calculation accuracy. Based on Table 4, the error was found to have a considerable range and was generally negative except at the 50-percent level for PAO sample A which gave a positive error. Generally the higher boiling PAO sample B gave more negative errors in absolute magnitude than did PAO sample A. The lower accuracy for mixtures of the PAO sample B was in part due to loss of any C_{60} oligomers and other material which was reported as "8% other" in Table 2.

Typical chromatograms have been reproduced in Figures 2 and 3 to demonstrate the baseline characteristics of these mixtures. The chromatograms in Figures 2 and 3 also provide a basis for qualitative identification of PAO in mineral oils and illustrate sensitivity. The lower limit of sensitivity is estimated at 2 wt % PAO in mineral oil when the PAO composition is similar to PAO samples A and B which are considered to be representative of commonly used PAO base stocks. The lower PAO concentrations are more readily calculated using a planimeter rather than a computer due to difficulties in defining the PAO peak baselines.

CONCLUSIONS

Based on the data summarized in Table 4 and the typical chromatograms reproduced in Figures 2 and 3, it can be concluded:

1. That the analytical procedure demonstrated in this report can be used to qualitatively and quantitatively detect the presence of polyalpha olefins such as the oligomers of decene-1 in mineral oil based lubricants.
2. Quantitative errors are associated with base line definition and undetectable components such as C_{60} oligomers which caused negative errors.
3. Some PAO peak base-line definition will depend on how closely different mineral oil base stocks approach a smooth boiling point curve as opposed to the more well-defined peaks of polyalpha olefins.

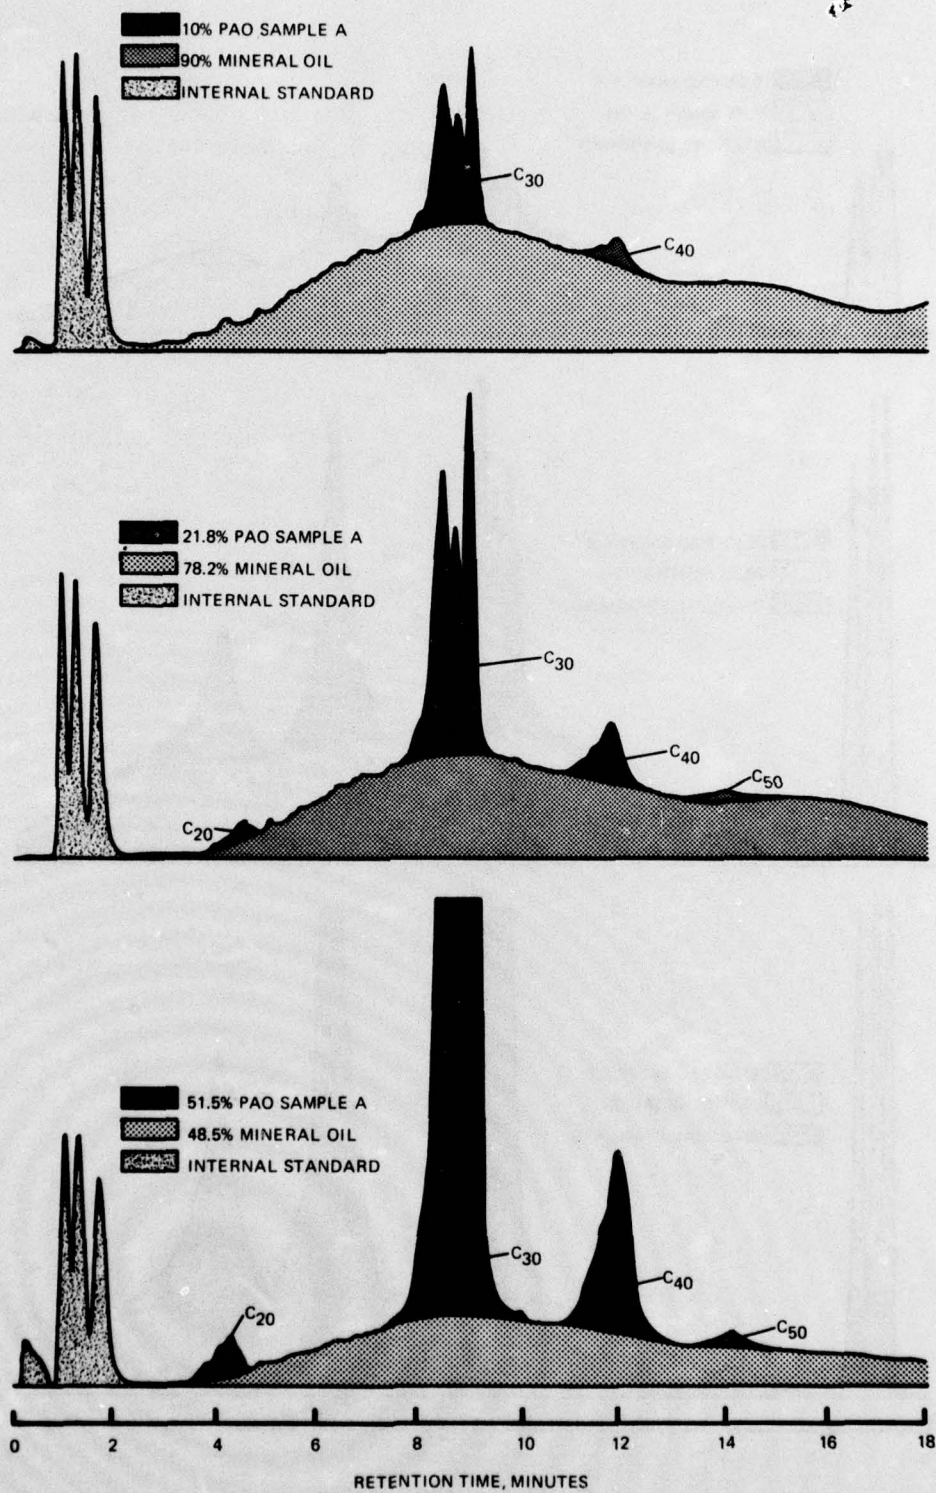


FIGURE 2. GAS CHROMATOGRAM FOR MIXTURES OF PAO SAMPLE A AND A MINERAL OIL

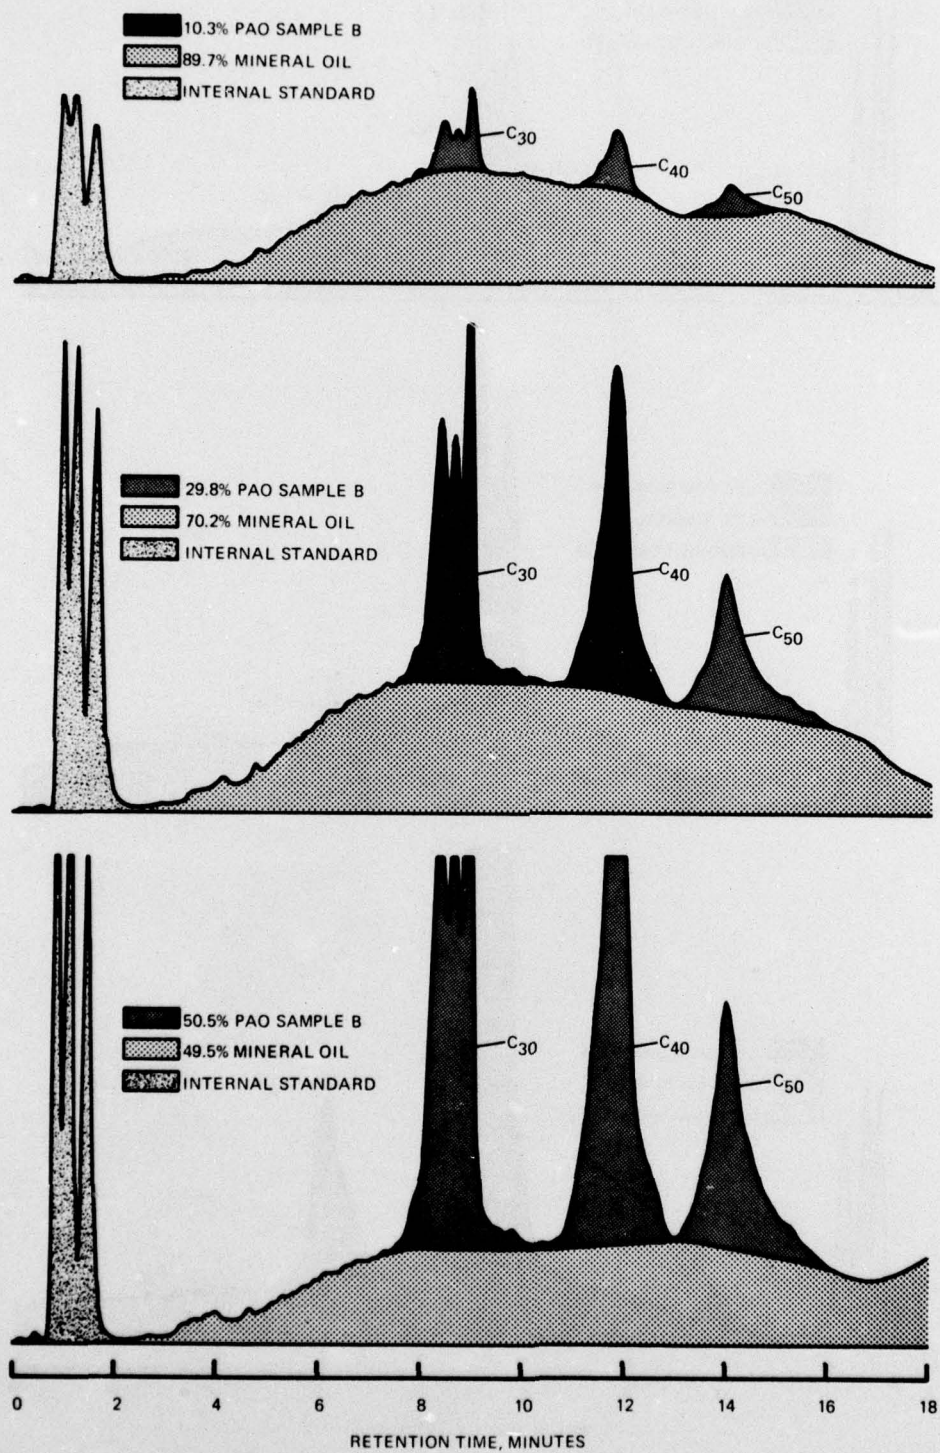


FIGURE 3. GAS CHROMATOGRAMS FOR MIXTURES OF
PAO SAMPLE B AND A MINERAL OIL

APPENDIX

GAS CHROMATOGRAPHIC OPERATING PARAMETERS

<i>Columns:</i>	1.2 meter by 0.32 centimeter O.D. 10% Dexsil 300 on 45/60 mesh Chromosorb P, A.W.
<i>Column Oven:</i>	200°C for 2 min; 200°C to 450°C @ 15°C/min, hold for 5 minutes
<i>Detector:</i>	450°C Dual HFID
<i>Inlet:</i>	Water-cooled septum, air-cooled movable port with inlet injector heater block at 325°C.
<i>Syringe:</i>	Inject 2.0 μ l with 3-inch (7.6 centimeter) needle fully inserted.
<i>Laboratory Data System:</i>	HP 3352 normalization method with timed events for defining baseline.
<i>Sample Preparation:</i>	Weigh out 5-gram oil sample into 10-ml volumetric flask. Add 0.56 g of internal standard composite into flask and dilute to 10-ml volume with carbon disulfide to lower the viscosity. Shake flask to mix components and let stand prior to analysis. Internal standard composite is prepared by weighing out equal amounts of n -C ₁₃ , n -C ₁₄ , and n -C ₁₅ into a stoppered vial.

DISTRIBUTION LIST

	No. of Copies		No. of Copies
<i>Department of Defense</i>			
Defense Documentation Center Cameron Station Alexandria, Virginia 22314	12	Director of Defense Research & Engineering (OSD) Attn: Dep Dir/Research & Technology Washington, D.C. 20301	1
Defense Fuel Supply Center Attn: DFSC-T Office of Technical Services Cameron Station Alexandria, Virginia 22314	3	Office of the Assistant Secretary of Defense Attn: Technical Advisory Panel on Fuels & Lubricants Washington, D.C. 20301	1
<i>Department of the Army - Technical Services</i>			
Commander U.S. Army Materiel Development and Readiness Command 5001 Eisenhower Road Attn: DRCLDC DRCMM-SP Alexandria, Virginia 22333	1 1	Commander U.S. Army Quartermaster School Petroleum & Field Service Department Attn: ATSM-TNG-PF Fort Lee, Virginia 23801	1
Commander U.S. Army Armament Command Attn: DRSAR-RE DRSAR-SM DRSAR-PP Rock Island, Illinois 61201	1 1 1	Commander U.S. Army Logistics Center Attn: ATCL-MS Fort Lee, Virginia 23801	1
Commander U.S. Army Missile Command Attn: DRSMI-RSM Redstone Arsenal, Alabama 35809	1	Commander U.S. Army Munitions Command Picatinny Arsenal Attn: SMUPA-D Dover, New Jersey 07801	1
Commander Anniston Army Depot Attn: Chemical Laboratory Anniston, Alabama 36202	1	Commander Watervliet Arsenal Attn: SMESV-RDR Watervliet, New York 12180	1
USAGMPA Petroleum Field Office (East) Attn: STSGP-PE STSGP-FT New Cumberland Army Depot New Cumberland, Pennsylvania 17070	1 1	Commander U.S. Army Ballistics Research Laboratory Attn: AMXBR-DL Aberdeen P.G., Maryland 21005	1
Commander USAGMPA Petroleum Field Office (West) Attn: STSGP-PW Sharpe Army Depot Lathrop, California 95330	1	Commander White Sands Missile Range Attn: Technical Library White Sands, New Mexico 88002	1
Commander U.S. Army Tank-Automotive Readiness Command Attn: DRSTA-GBA DRSTA-R Warren, Michigan 48090	1 3	Commander U.S. Army Mobility Equipment Research & Development Command Attn: DRDME-GL DRDME-U DRDME-C Fort Belvoir, Virginia 22060	10 1 1
Commander U.S. Army Tank-Automotive Research & Development Command Attn: DRDTA-R DRDTA-CL Warren, Michigan 48090	4 1	Commander Corpus Christi Army Depot Naval Air Station Attn: DRSAQ-Q Corpus Christi, Texas 78419	1

PRECEDING PAGE BLANK - NOT FILMED

	No. of Copies		No. of Copies
<i>Department of the Army—Technical Services (Cont'd)</i>			
DoD Project Manager—Mobil Electric Power Attn: DRCPM-MEP-TM 7500 Backlick Road Springfield, Virginia 22150	1	Commander U.S. Army Alaska Support Command Attn: ARCL-Q APO Seattle, Washington 98749	1
Commander U.S. Army Foreign Science & Technology Center Federal Bldg Attn: DRXST-GE Charlottesville, Virginia 22901	1	President U.S. Army Armor & Engineer Board Attn: STEBB-EN Fort Knox, Kentucky 40121	1
U.S. Army Ordnance Center and School Attn: ATSL-CTD-MS-A Aberdeen Proving Ground, Maryland 21005	1	Commander Yuma Proving Ground Attn: STEYP-MTS STEYP-MTM STEYP-MLS Yuma, Arizona 85369	1 1 1
Commander U.S. Army Materials & Mechanics Research Center Attn: DRXMR-TMS Watertown, Massachusetts 02172	1	Corp of Engineers Washington Aqueduct Division 5900 MacArthur Blvd Washington, D.C. 20315	1
Commander U.S. Army Troop Support Command 4300 Goodfellow Blvd Attn: Technical Library DRSTS-RE St. Louis, Missouri 63120	1 1	Commander U.S. Army Maintenance Management Center Attn: DRXMD-T Lexington, Kentucky 40507	1
Deputy Chief of Staff Research & Development Army Department of the Army Attn: DAMA-CSS Washington, D.C. 20310	2	Commander 172nd Infantry Brigade Alaska Attn: AFZT-DI-LW APO Seattle, Washington 98749	1
Commander U.S. Army Research Office (Durham) Box CM, Duke Station Durham, North Carolina 27706	1	Commander U.S. Army Air Mobility R&D Laboratory Eustis Directorate Attn: SAVDL-EU-TAP Fort Eustis, Virginia 23604	1
Commander U.S. Army Aviation School Attn: Office of the Librarian Fort Rucker, Alabama 36362	1	Commander U.S. Army Systems Analysis Agency Attn: DRXSY-CM Aberdeen Proving Ground, Maryland 21005	1
Commander U.S. Army Chemical Research & Development Laboratories Attn: Directorate of Weapons Systems (SMUCR-WS) Edgewood Arsenal, Aberdeen Proving Ground, Maryland 21010	1	Commander U.S. Army Natick Development Center Attn: DRXNM-YPB Natick, Massachusetts 01760	1
Commander U.S. Army Arctic Test Activity APO 731 Seattle, Washington 98731	1	Commander U.S. Naval Air Systems Command Attn: AIR 53451B AIR 53645 Washington, D.C. 20361	1 1

	No. of Copies		No. of Copies
<i>Department of the Navy</i>			
Commander Naval Air Development Center Code 30212 Warminster, Pennsylvania 18974	1	Commander U.S. Marine Corps Attn: LME-2 Navy Annex Washington, D.C. 20380	1
Commander Naval Ordnance Systems Command Attn: Technical Library (ORD-9132) Washington, D.C. 20360	2	Commander Naval Ship Engineering Center Code 6101F, Center Bldg Prince George's Center Hyattsville, Maryland 20782	1
Director U.S. Naval Research Laboratory Attn: Code 6200 Code 6180 Washington, D.C. 20390	1 1	Commander Naval Ship R&D Center Annapolis Laboratory Code 2831 Attn: Technical Library Annapolis, Maryland 21402	1 1
Superintendent U.S. Naval Post Graduate School Attn: Technical Reports Section Monterrey, California 93940	1	Commander Naval Facilities Engineering Command Transportation Maintenance Management Branch Attn: Code 10332 Washington, D.C. 20390	1
Commander U.S. Naval Air Station Overhaul & Repair Department North Island San Diego, California 92135	1	Commander Naval Air Propulsion Test Center Attn: PE7 Trenton, New Jersey 08628	2
Commander U.S. Naval Civil Engineering Laboratory Port Hueneme, California 93041	1		

Department of the Air Force

Commander Air Force Aero Propulsion Laboratory (AFSC) Attn: AFPL/SFF/SFL Wright-Patterson Air Force Base, Ohio 45433	3	Headquarters U.S. Air Force (RDPS) Washington, D.C. 20330	1
Commander SAALC San Antonio Air Logistics Center Attn: SFQ Kelly Air Force Base, Texas 78241	1	Commander Air Force Materials Laboratory Attn: MBT Wright-Patterson Air Force Base, Ohio 45433	1

Other Government Agencies

Scientific & Technical Information Facility P.O. Box 33 Attn: NASA Representative (SAK/DL) College Park, Maryland 20740	1	Federal Aviation Administration 800 Independence Avenue, S.W. Attn: Administrative Standards Division (MS-110) Washington, D.C. 20590	2
--	---	--	---